





WPR EP - VM/VE



TECHNICAL DATA

- Flow:** G 3/8: 50 l/min with 30 l/min in R
G 1/2: 90 l/min with 50 l/min in R
- Max working pressure:** 250 bar (350 bar)
- Materials:** Aluminium Body (Steel body if required)
- Version:** Exceeding Flow to Pressure
- Note:** Hand Wheel in Aluminium Black Anodized
- Weight:** 2,300 Kg (3,900 Kg)

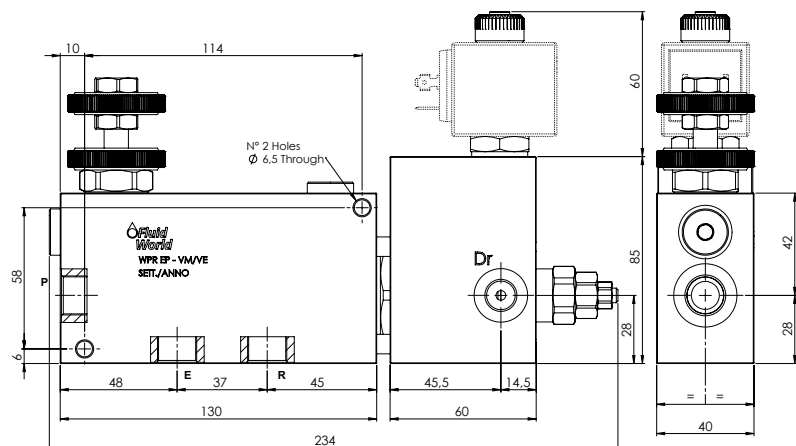

PORTS		
P - R - E	3/8	1/2
Dr	1/4	

COMPENSATION CURVES

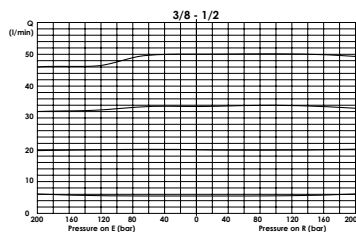

SPRINGS

Code	Adjustable pressure range bar	Pressure increase bar/turn	Standard setting bar
05	20-70	10	20
20	50-180	25	50
35	130-350	60	130

ORDERING CODE:

WPR	EP								
Ports Size:	Spring Pressure Relief Valve:	Adjustment if Required:	Solenoid Valve:	Manual Overrides:	Coil:	Material Body:	Type of Regulator:		
- 3/8 - 1/2	- Omit if not required - VM05 - VM20 - VM35	- Omit if not required - Value	- Omit if not required - VE NA - VE NC	- Omit if not required - EMS = Screw - EMP = Push - EMPT = Push & Twist	- Omit if not required - 12 - 24	- Omit if aluminium - S = Steel	- Omit if not required - K = Graduated Knob		