
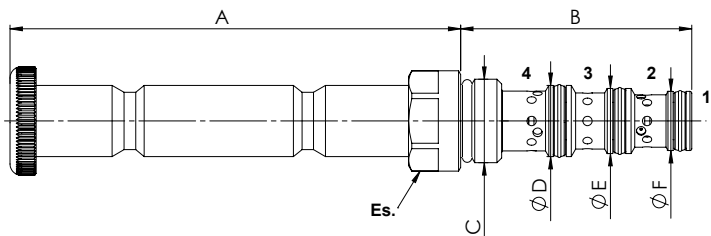


TECHNICAL DATA

- **Flow:** (See table)
- **Max working pressure:** 210 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Spool Type - Direct Acting
- **Cavity:** (See table)
- **Installation torque:** (See table)
- **Weight:** (See table)

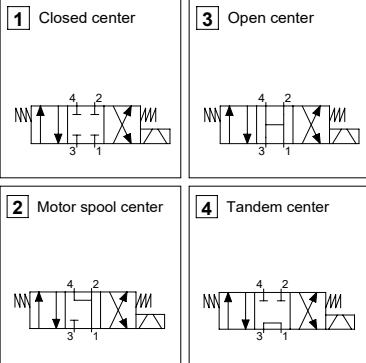

PORTS		
Size	S08	S10
DIMENSIONS		
A	95,4	121
B	54,3	62
C	3/4-16UNF	7/8-14UNF
D	15,8	19
E	14,2	17,4
F	12,6	15,8
Es.	24	24
Max Flow (l/min)	10	20
Cavity	FW3402000	FW7802000
Installation torque (Nm)	30	40
Weight (kg)	0,190	0,350

MANUAL OVERRIDE

(EMP)
Push



ORDERING CODE:

WFW

Ports Size:

- S08 = SAE 08/4
- S10 = SAE 10/4

Hydraulic Scheme:



- 1
- 2
- 3
- 4

Manual Overrides (only for S08):

- Omit if not required
- EMP = Push



TECHNICAL DATA

- **Flow:** (See table)
- **Max working pressure:** 210 bar (210 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Spool Type - Direct Acting
- **Note:** Coil for S08 on the page 261
Coil for S10 on the page 262

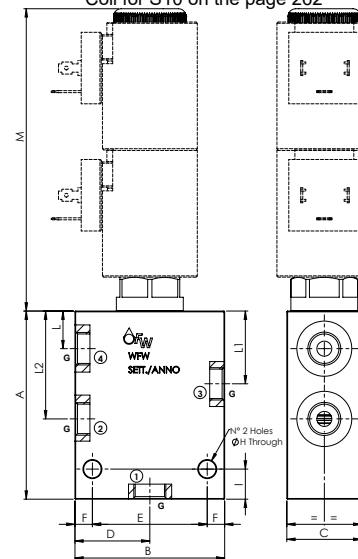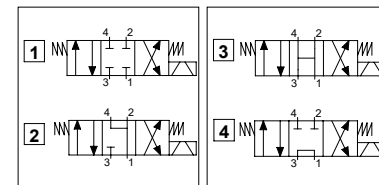

PORTS		
Size	S08	S10
G	1/4 3/8	1/2
DIMENSIONS		
A	75	85
B	60	60
C	30	35
D	30	30
E	46	48
F	7	6
H	7	7
I	12	8
L	15,5	18,5
L1	29,5	34,5
L2	43,5	50,5
M	94	120,5
Max Flow (l/min)	10	20

PRESSURE DROP CURVES

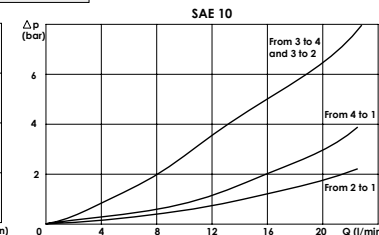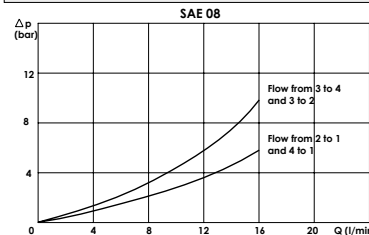

MANUAL OVERRIDE

(EMP)
Push



ORDERING CODE:

WFW

Ports Size:

- S08 = SAE 08/4
- S10 = SAE 10/4

Hydraulic Scheme:

- 1
- 2
- 3
- 4

Manual Overrides (only for S08):

- Omit if not required
- EMP = Push

Ports Size:

- 1/4 ; 3/8
- 1/2

Material Body:

- Omit if steel
- A = Aluminium

Rated Voltage Coil:

- Omit if not required
- 12
- 24