SOLENOID OPERATED VALVE 4/3
VALVOLA ELETTRICA 4/3

WFW

- **Flow:** See table
- **Max working pressure:** 210 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Spool Type- Direct Acting
- **Cavity:** See table
- **Installation torque:** See table
- **Weight:** See table

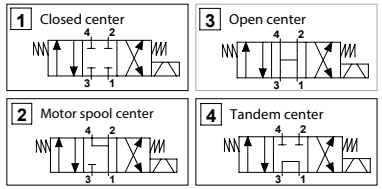

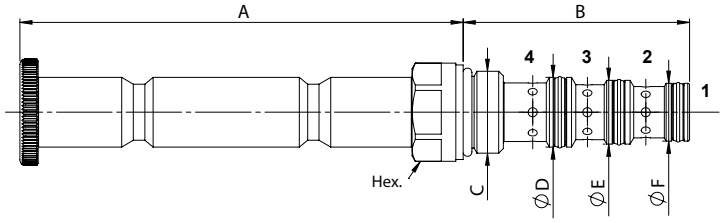

PORTS		
Size	S08	S10
DIMENSIONS		
A	95,4	121
B	54,3	62
C	3/4-16UNF	7/8-14UNF
D	15,8	19
E	14,2	17,4
F	12,6	15,8
Hex.	24	24
Max Flow (l/min)	12	20
Cavity	FW3404000	FW7804000
Installation torque (Nm)	30	40
Weight (kg)	0,190	0,350

PRESSURE DROP CURVES

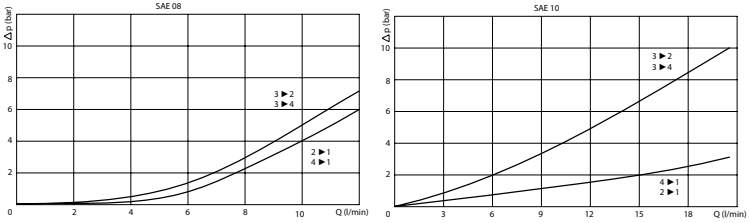

ORDERING CODE

WFW		
	Ports Size:	**Hydraulic Scheme:**
	- S08 = SAE 08/4	- 1
	- S10 = SAE 10/4	- 2
		- 3
		- 4

SOLENOID OPERATED VALVE 4/3 WITH BODY
VALVOLA ELETTRICA 4/3 CON CORPO

WFW

- **Flow:** See table
- **Max working pressure:** 210 bar (210 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Spool Type- Direct Acting
- **Note:** 22W coil for S08 on the page 313
  24W coil for S10 on the page 314

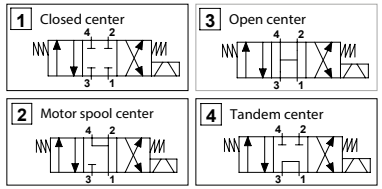

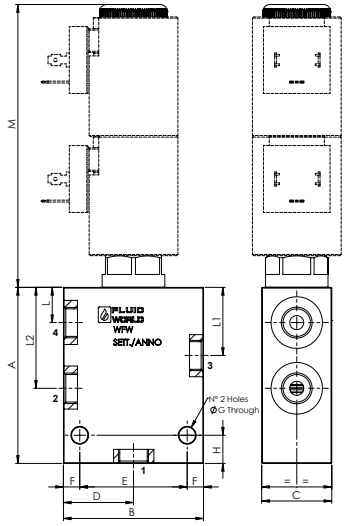

PORTS		
Size	S08	S10
1 - 2 - 3 - 4	1/4 3/8	1/2
DIMENSIONS		
A	75	85
B	60	60
C	30	40
D	30	30
E	46	46
F	7	7
G	6,5	6,5
H	12	8
L	15,5	18,5
L1	29,5	34,5
L2	43,5	50,5
M	94	120,5
Max Flow (l/min)	12	20

PRESSURE DROP CURVES

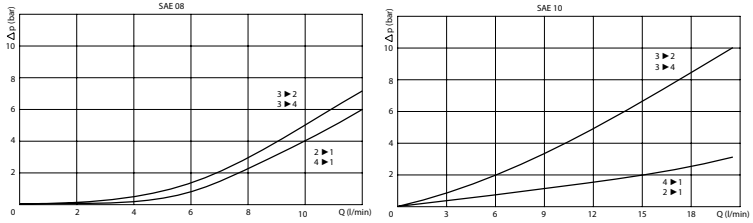

ORDERING CODE

WFW					
	Ports Size:	**Hydraulic Scheme:**	**Ports Size:**	**Material Body:**	**Rated Voltage Coil:**
	- S08 = SAE 08/4	- 1	- 1/4 ; 3/8	- Omit if Aluminium	- Omit if not required
	- S10 = SAE 10/4	- 2	- 1/2	- S = Steel	- 12
		- 3			- 24
		- 4			