



## WRS

### TECHNICAL DATA


- **Flow:** See table
- **Max working pressure:** 350 bar
- **Cracking pressure:** 0,5 bar
- **Materials:** Cartridge in Steel Zinc Plated
- **Version:** Ball Type - Direct Acting
- **Cavity:** See table
- **Installation torque:** See table
- **Weight:** See table
- **Note:** Valve supplied with single components

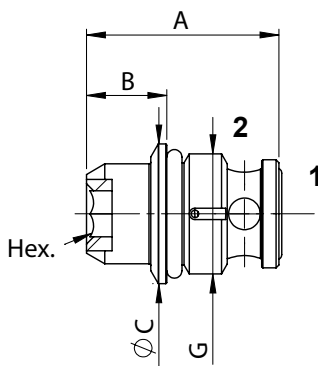

### PORTS

| G                     | 1/2        | 3/4        |
|-----------------------|------------|------------|
| DIMENSIONS            |            |            |
| A                     | 33,5       | 45,5       |
| B                     | 14         | 14         |
| C                     | 24,5       | 31         |
| Hex.                  | 8          | 10         |
| Max Flow (l/min)      | 60         | 90         |
| Cavity                | FW12000210 | FW34000210 |
| Install. Torque (N/m) | 50         | 70         |
| Weight (kg)           | 0,055      | 0,110      |

### PRESSURE DROP CURVES

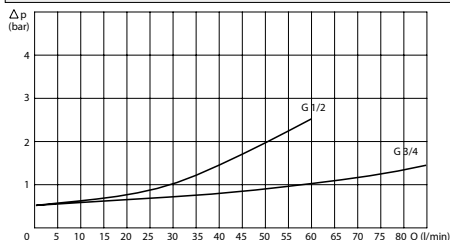

### ORDERING CODE

WRS

Ports Size:

- 1/2
- 3/4