
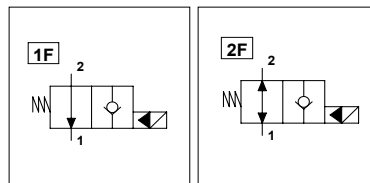


WST S08 NA - L

TECHNICAL DATA

- **Flow:** 30 l/min
- **Max working pressure:** 300 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Poppet Type - Pilot Acting
- **Cavity:** FW3402000
- **Installation torque:** 30 Nm
- **Weight:** 0,120 kg

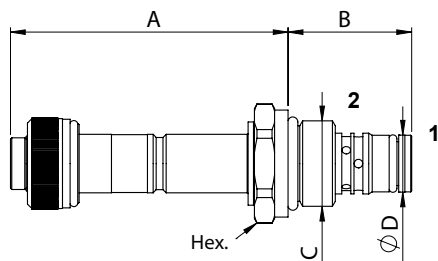


PORTS

Size S08


DIMENSIONS

A	61,8
B	27,5
C	3/4-16UNF
D	12,7
Hex.	24

PRESSURE DROP CURVES

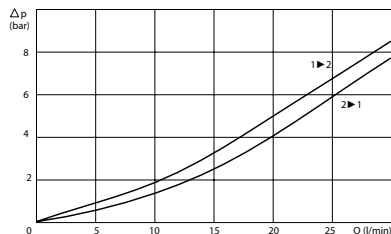

MANUAL OVERRIDE



ORDERING CODE

WST

S08

NA

L

Type of Scheme:

- Omit for scheme 1F
- 2F = Scheme 2F



Manual Override:

- Omit if not required
- EMP = Push
- EMPT = Push & Twist

WST S08 NA - L

TECHNICAL DATA

- **Flow:** 30 l/min
- **Max working pressure:** 250 bar (300 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Poppet Type - Pilot Acting
- **Note:** 18W coil on the page 289

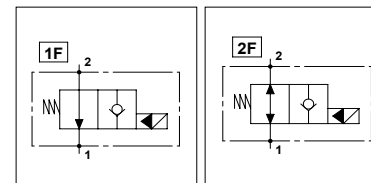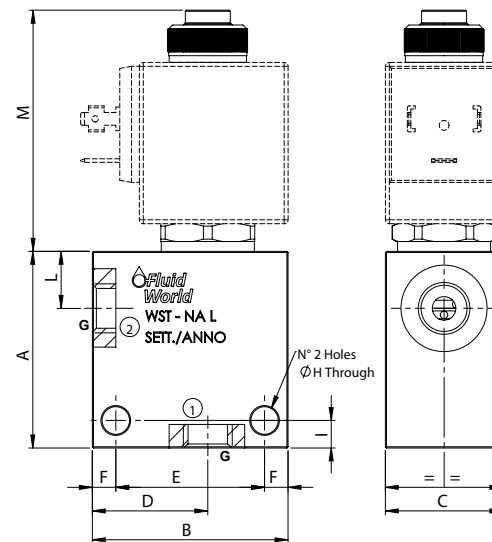


PORTS

Size S08


DIMENSIONS

G	1/4
	3/8
A	50
B	50
C	30
D	30
E	38
F	6
H	7
I	7
L	14,5
M	61,3

PRESSURE DROP CURVES

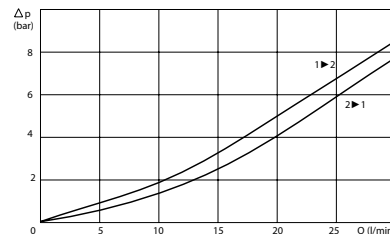

MANUAL OVERRIDE



ORDERING CODE

WST

S08

NA

L

Type of Scheme:

- Omit for scheme 1F
- 2F = Scheme 2F

Manual Override:

- Omit if not required
- EMP = Push
- EMPT = Push & Twist

Ports

- 1/4
- 3/8

Material Body:

- Omit if Aluminium
- S = Steel

Optional Body (Only for S08):

- Omit if not required
- B
- EMS

Rated Voltage

- Omit if not required
- 12
- 24