WST S08 NA - L

- **Flow:** 30 l/min
- **Max working pressure:** 300 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Poppet Type- Pilot Acting
- **Cavity:** FW3402000
- **Installation torque:** 30 Nm
- **Weight:** 0,120 kg

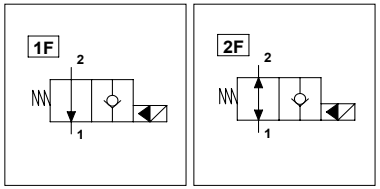

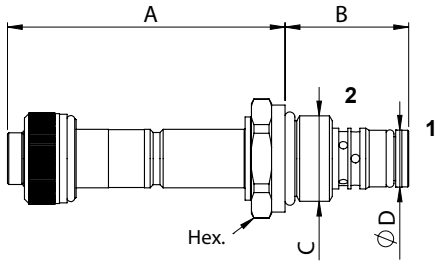

PORTS	
Size	S08
DIMENSIONS	
A	61,8
B	27,5
C	3/4-16UNF
D	12,7
Hex.	24

PRESSURE DROP CURVES

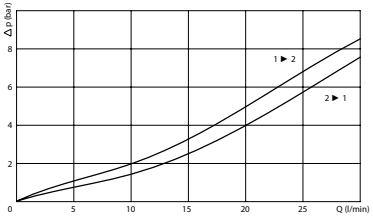

MANUAL OVERRIDE

(EMP) Push	
(EMPT) Push & Twist	

ORDERING CODE

WST	S08	NA		L	

Type of Scheme:
- Omit for scheme 1F
- 2F = Scheme 2F

Manual Override:
- Omit if not required
- EMP = Push
- EMPT = Push & Twist

WST S08 NA - L

- **Flow:** 30 l/min
- **Max working pressure:** 250 bar (300 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Poppet Type- Pilot Acting
- **Note:** 18W coil on the page 312

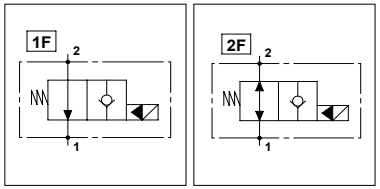

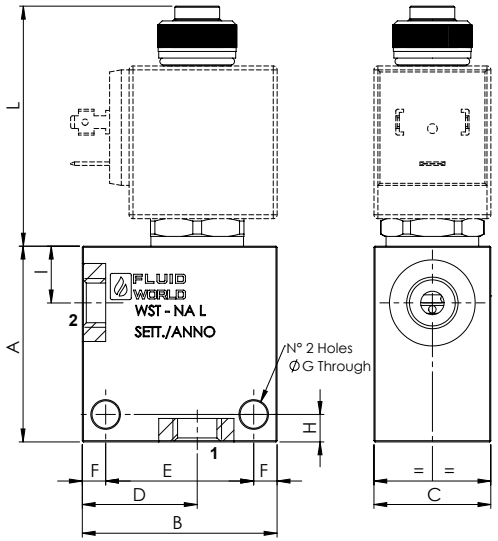

PORTS	
Size	S08
1 - 2	**1/4**
	3/8
DIMENSIONS	
A	50
B	50
C	30
D	30
E	38
F	6
G	7
H	7
I	14,5
L	61,3

PRESSURE DROP CURVES

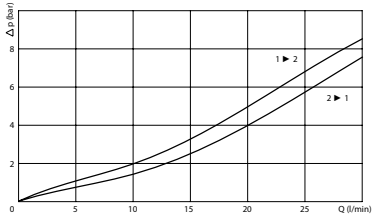

MANUAL OVERRIDE

(EMP) Push	
(EMPT) Push & Twist	

ORDERING CODE

WST	S08	NA		L					

Type of Scheme:
- Omit for scheme 1F
- 2F = Scheme 2F

Manual Override:
- Omit if not required
- EMP = Push
- EMPT = Push & Twist

Ports Size:
- 1/4
- 3/8

Material Body:
- Omit if Aluminium
- S = Steel

Optional Body (Only for S08):
- Omit if not required
- B
- EMS

Rated Voltage Coil:
- Omit if not required
- 12
- 24

Information about optional body is available at page 325 and 326