SOLENOID OPERATED VALVE 3/2
VALVOLA ELETTRICA 3/2

WTW - 01

- **Flow:** See table
- **Max working pressure:** See table
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Spool Type- Direct Acting
- **Cavity:** See table
- **Installation torque:** See table
- **Weight:** See table



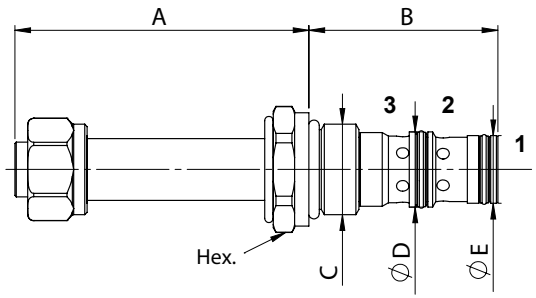

PORTS		
Size	S08	S10
DIMENSIONS		
A	61,7	77
B	39,7	46,5
C	3/4-16UNF	7/8-14UNF
D	15,8	17,4
E	14,2	15,8
Hex.	24	27
Max Pressure (bar)	210	210
Max Flow (l/min)	12	20
Cavity	FW3403000	FW7803000
Installation torque (Nm)	30	40
Weight (kg)	0,150	0,300

PRESSURE DROP CURVES

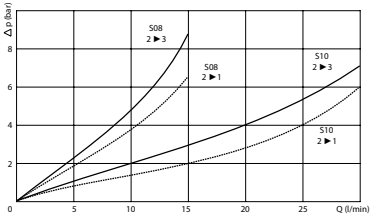

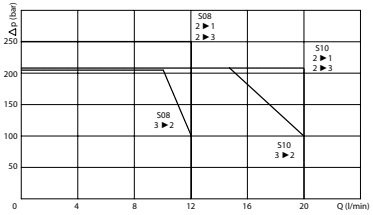

MANUAL OVERRIDE	
(EMS) Screw	

ORDERING CODE

WTW		01	
	Ports Size: - S08 = SAE 08/3 - S10 = SAE 10/3		**Manual Override:** - Omit if not required - EMS = Screw

SOLENOID OPERATED VALVE 3/2 WITH BODY
VALVOLA ELETTRICA 3/2 CON CORPO

WTW - 01

- **Flow:** See table
- **Max working pressure:** 210 bar (210 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Spool Type- Direct Acting
- **Note:** 22W coil for S08 on the page 313
  24W coil for S10 on the page 314



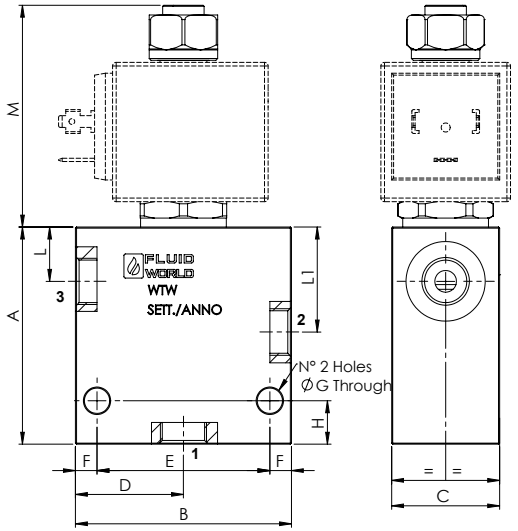

PORTS		
Size	S08	S10
1 - 2 - 3	1/4	1/2
	3/8	
DIMENSIONS		
A	60	65
B	60	60
C	30	35
D	30	30
E	46	48
F	7	6
G	7	7
H	12	7
L	15,5	18,5
L1	29,5	34,5
M	61,2	76,5
Max Flow (l/min)	12	20

PRESSURE DROP CURVES

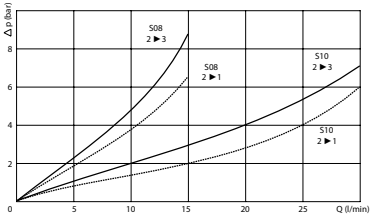

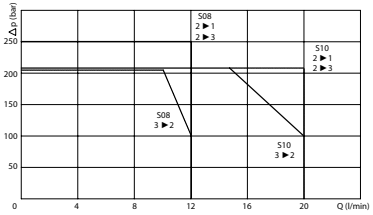

MANUAL OVERRIDE	
(EMS) Screw	

ORDERING CODE

WTW		01				
	Ports Size: - S08 = SAE 08/3 - S10 = SAE 10/3		**Manual Override:** - Omit if not required - EMS = Screw	**Ports Size:** - 1/4 ; 3/8 - 1/2	**Material Body:** - Omit if Aluminium - S = Steel	**Rated Voltage Coil:** - Omit if not required - 12 - 24