



WTW S08 03

TECHNICAL DATA



- **Flow:** 12 l/min
- **Max working pressure:** 210 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Spool Type - Direct Acting
- **Cavity:** FW3403000
- **Installation torque:** 30 Nm
- **Weight:** 0,150 kg



PORTS	
Size	S08
DIMENSIONS	
A	61,8
B	39,7
C	3/4-16UNF
D	15,8
E	14,2
Hex.	24

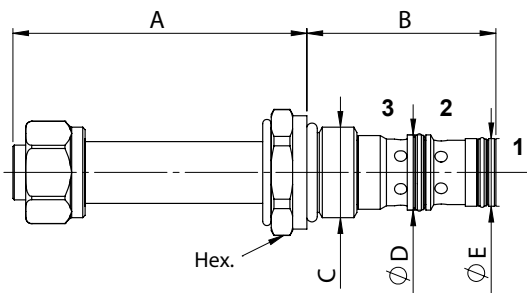


PRESSURE DROP CURVES

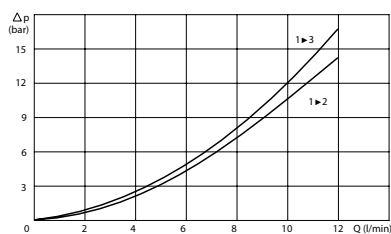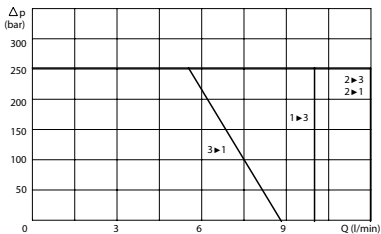

MANUAL OVERRIDE

(EMS)
Screw



ORDERING CODE

WTW

S08


03

Manual Override:
- Omit if not required
- EMS = Screw


WTW S08 03

TECHNICAL DATA



- **Flow:** 12 l/min
- **Max working pressure:** 210 bar (210 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Spool Type - Direct Acting
- **Note:** 22W coil for S08 on the page 290



PORTS	
Size	S08
G	1/4 3/8
DIMENSIONS	
A	60
B	60
C	30
D	30
E	46
F	7
H	7
I	12
L	15,5
L1	29,5
M	61,8

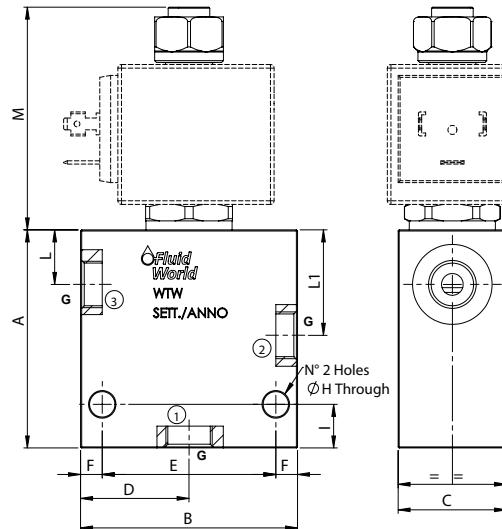


PRESSURE DROP CURVES

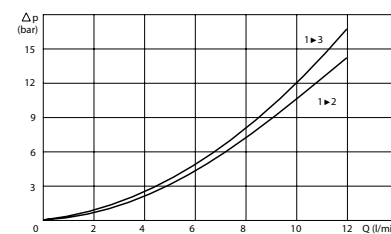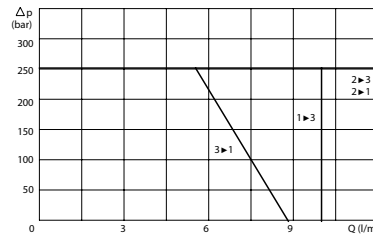

MANUAL OVERRIDE

(EMS)
Screw



ORDERING CODE

WTW

S08

03

Manual Override:
- Omit if not required
- EMS = Screw

Ports Size:
- 1/4
- 3/8

Material Body:
- Omit if Aluminium
- S = Steel

Rated Voltage Coil:
- Omit if not required
- 12
- 24