WTW S08 03

- **Flow:** 12 l/min
- **Max working pressure:** 210 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Spool Type- Direct Acting
- **Cavity:** FW3403000
- **Installation torque:** 30 Nm
- **Weight:** 0,150 kg



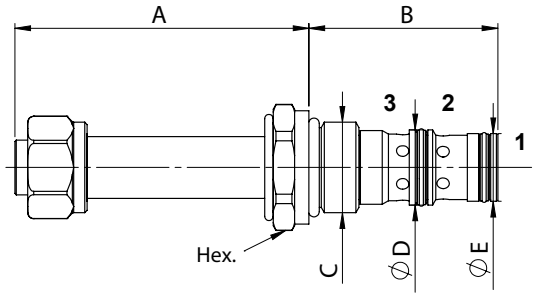

PORTS	
Size	S08
DIMENSIONS	
A	61,8
B	39,7
C	3/4-16UNF
D	15,8
E	14,2
Hex.	24

PRESSURE DROP CURVES

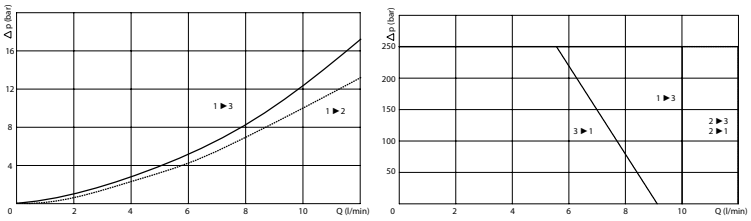

MANUAL OVERRIDE

(EMS) Screw	

ORDERING CODE

WTW	S08	03	

Manual Override:
- Omit if not required
- EMS = Screw

WTW S08 03

- **Flow:** 12 l/min
- **Max working pressure:** 210 bar (210 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Spool Type- Direct Acting
- **Note:** 22W coil for S08 on the page 313



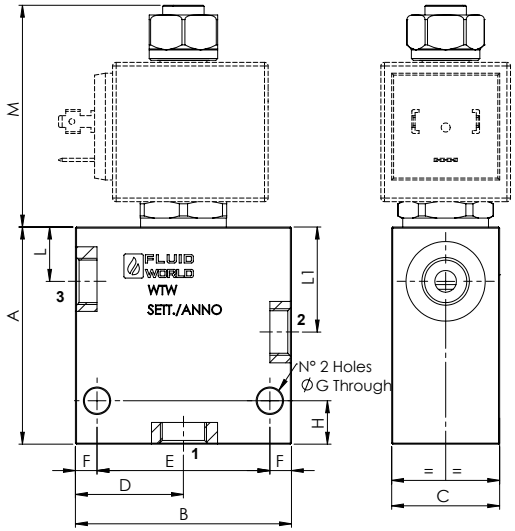

PORTS	
Size	S08
1 - 2 - 3	1/4
	3/8
DIMENSIONS	
A	60
B	60
C	30
D	30
E	46
F	7
G	7
H	12
L	15,5
L1	29,5
M	61,8

PRESSURE DROP CURVES

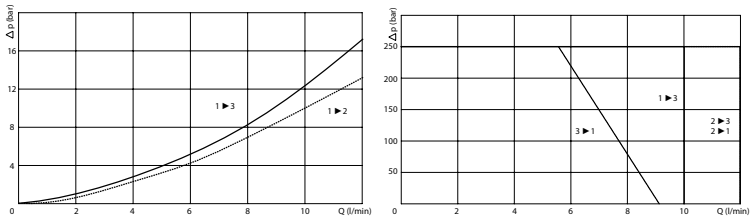

MANUAL OVERRIDE

(EMS) Screw	

ORDERING CODE

WTW	S08	03				

Manual Override:
- Omit if not required
- EMS = Screw

Ports Size:
- 1/4
- 3/8

Material Body:
- Omit if Aluminium
- S = Steel

Rated Voltage Coil:
- Omit if not required
- 12
- 24