WTWT S10 02

- **Flow:** 20 l/min
- **Max working pressure:** 210 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Spool Type- Direct Acting
- **Cavity:** FW7803000
- **Installation torque:** 40 Nm
- **Weight:** 0,270 kg



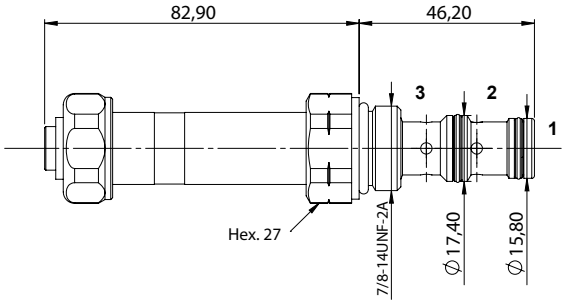

PRESSURE DROP CURVES

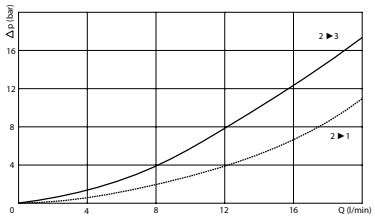

MANUAL OVERRIDE	
(EMS) Screw	

ORDERING CODE

WTWT	S10	02	

Manual Override:
- Omit if not required
- EMS = Screw

WTWT S10 02

- **Flow:** 20 l/min
- **Max working pressure:** 210 bar (210 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Spool Type- Direct Acting
- **Note:** 26W coil on the page 315



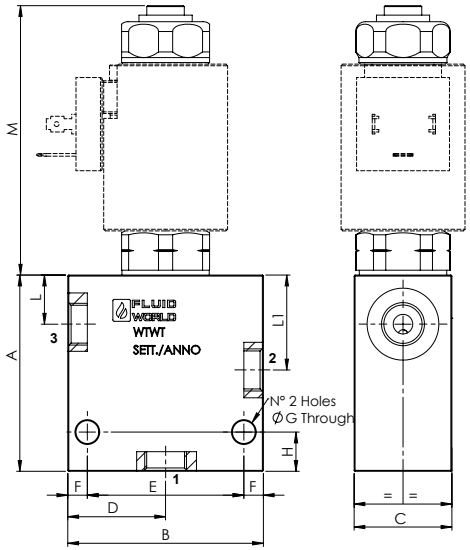

PORTS		
Size	S10	
1 - 2 - 3	3/8	1/2
DIMENSIONS		
A	60	65
B	60	60
C	30	35
D	30	30
E	46	48
F	7	6
G	7	7
H	12	7
L	15,5	18,5
L1	29,5	34,5
M	82,4	82,4

PRESSURE DROP CURVES

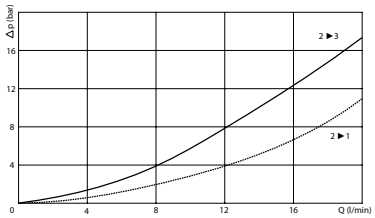

MANUAL OVERRIDE	
(EMS) Screw	

ORDERING CODE

WTWT	S10	02				

Manual Override:
- Omit if not required
- EMS = Screw

Ports Size:
- 3/8
- 1/2

Material Body:
- Omit if Aluminium
- S = Steel

Rated Voltage:
Coil:
- Omit if not required
- 12
- 24